


GeTX-COV018

CHANGE OVER SWITCH



FEATURES

- Four-phase Conversion: L1 / L2 / L3 / L4 four phases supply power sequentially. BX-COV020-D always gives priority to L1 phase to supply power to the user. (L1> L2> L3> L4).
- Auxiliary Switch: When the L4-phase generator supplies electricity to the users, any of the above(L1,L2,L3) calls, the change over switch will turn off the generator through the auxiliary switch to reduce the noise of the generator.
- Flame Retardant Material able to reach the experimental standards of level test of UL94-5VA.

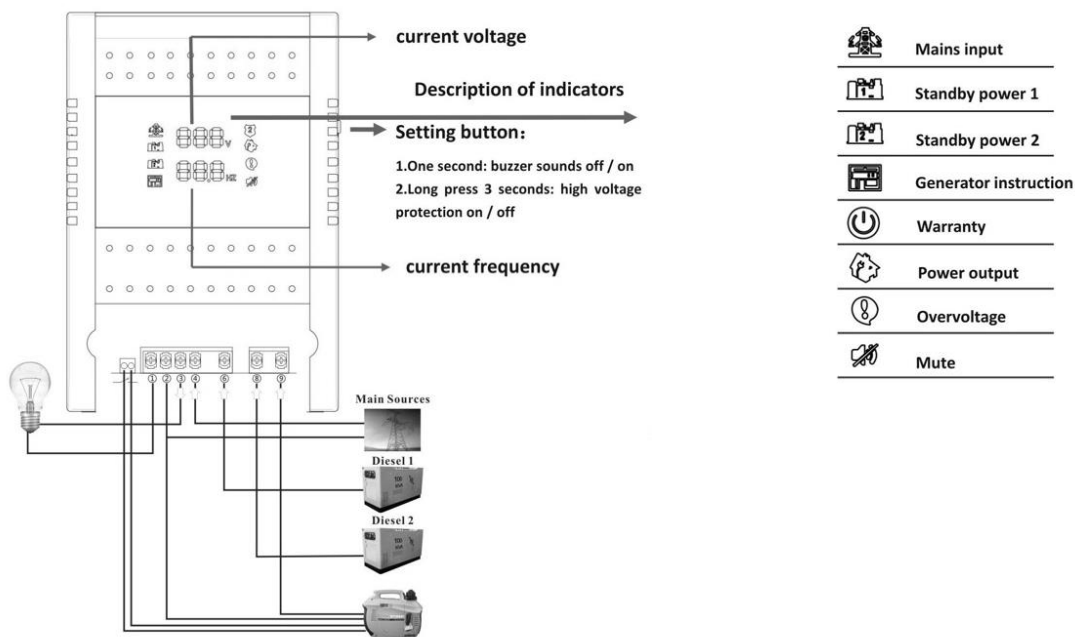

SPECIFICATIONS

MODEL	GeTX-COV018
Rated Working Voltage	120VAC/50HZ-60HZ
Under Voltage	120VAC
Over Voltage	260VAC
Working Current	30A (6600WMAX)
Delay Time	7 seconds
Temperature	-5°C~+55°C
Weight	573g
Size	134*197*42mm
Material	Flame Retardant PC

WARNING

- The total power of connected electrical equipment shall not exceed the rated power.
- Do not use this product in damp or not ventilated environment.
- Non-professionals do not open, change, repair the product.
- Poor connection of the front terminal or poor connection of the plug may cause a danger.